



浙江世菱半导体有限公司  
ZHEJIANG SHILING SEMICONDUCTOR CO.,LTD.

## 产品规格书

### Specification of Products

产品名称：快恢复二极管

产品型号：MURP200400CT

浙江世菱半导体有限公司  
ZHEJIANG SHILING SEMICONDUCTOR CO., LTD.

地址：浙江省 丽水市 莲都区

电话：(0578) 3012571 3615078

传真：(0578) 3611180

邮编：323000

E-mail: smrshiling01@163.com

[Http://www.smrshiling.com](http://www.smrshiling.com)

| 拟制  | 审核  | 核准 |
|-----|-----|----|
| 林益龙 | 曹剑龙 | 宗瑞 |

## UltraFast Soft RecoveryDiode Module

### Description

Ultra-FRD module devices are optimized to reduce losses and EMI/RFI in high frequency power conditioning electrical systems. These diode modules are ideally suited for power converters, motor drives and other applications where switching losses are significant portion of the total losses

### Features


- ☛ Repetitive Reverse Voltage :  $V_{RRM} = 400V$
- ☛ Low Forward Voltage Drop<sub>F</sub>:  $V(\text{typ.}) = 1.0V$
- ☛ Average Forward Current :  $I_F(\text{AV.}) = 200A @ T_c = 100^\circ\text{C}$
- ☛ Ultra-Fast Reverse Recovery Time :  $t_{rr}(\text{typ.}) = 95 \text{ ns}$
- ☛ Extensive Characterization of Recovery Parameters
- ☛ Reduced EMI and RFI
- ☛ Non Isolation Type Package

### Applications

Motor Drives Free wheel use, High Power Converters, Welders, Various Switching and Telecommunication Power Supply.

### Equivalent Circuit and Package

Equivalent Circuit

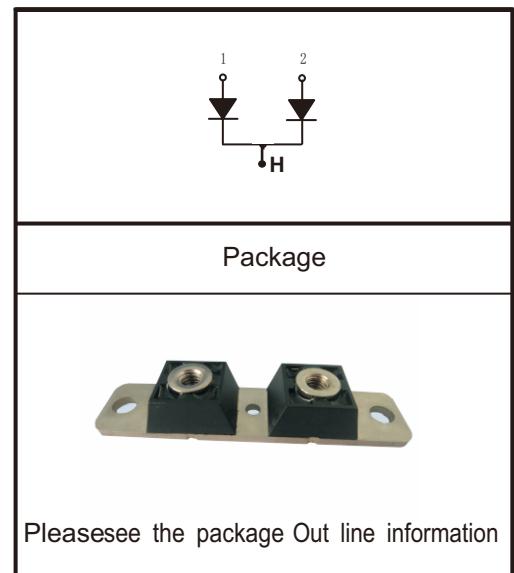

### Absolute Maximum Ratings @ $T_j = 25^\circ\text{C}$ (Per Leg)


| Symbol             | Parameter   | Conditions  | Ratings       | Unit                  |
|--------------------|---|---|---------------|-----------------------|
| $V_{RRM}$          | Repetitive Peak Reverse Voltage   |   | 400           | V                     |
| $V_{R(\text{DC})}$ | Reverse DC Voltage  |   | 320           | V                     |
| $I_F(\text{AV.})$  | Average Forward Current @ $T_c = 25^\circ\text{C}$<br>@ $T_c = 100^\circ\text{C}$ | Resistive Load  | 400           | A                     |
|                    |   |   | 200           | A                     |
| $I_{FSM}$          | Surge (non-repetitive) Forward Current  | One Half Cycle at 60Hz, Peak Value  | 3300          | A                     |
| $I_t^2$            | $I^2t$ for Fusing   | Value for One Cycle Current $t_w = 8.3\text{ms}$ , $T_j = 25^\circ\text{C}$ Start | $45.0 * 10^3$ | $\text{A}^2 \text{s}$ |
| $T_j$              | Junction Temperature  |   | -40 ~ 125     | $^\circ\text{C}$      |
| $T_{sta}$          | Storage Temperature   |   | -40 ~ 125     | $^\circ\text{C}$      |
| $P_d$              | Maximum Power Dissipation   |   | 700           | W                     |
| -                  | Mounting Torque   |   | 4.0           | N.m                   |
| -                  | Terminal Torque   |   | 3.0           | N.m                   |

## Thermal Characteristics

| Symbol        | Parameter          | Conditions       | Values |      |      | Unit |
|---------------|--------------------|------------------|--------|------|------|------|
|               |                    |                  | Min.   | Typ. | Max. |      |
| $R_{th(j-c)}$ | Thermal Resistance | Junction to Case | -      | -    | 0.15 | °C/W |

## Electrical Characteristics @ $T_j=25^\circ\text{C}$ (unless otherwise specified)

| Symbol    | Parameter                       | Conditions                                      | Values                    |      |      | Unit |
|-----------|---------------------------------|---|---------------------------|------|------|------|
|           |                                 |   | Min.                      | Typ. | Max. |      |
| $V_R$     | Cathode Anode Breakdown Voltage | $I_R = 100\mu\text{A}$                          | 400                       | -    | -    | V    |
| $V_{FM}$  | Maximum Forward Voltage         | $I_{FM} = 200\text{A}, T_c = 25^\circ\text{C}$  | -                         | 1.0  | 1.1  | V    |
|           |                                 | $I_{FM} = 200\text{A}, T_c = 100^\circ\text{C}$ | -                         | 0.9  | 1.0  | V    |
| $I_{RRM}$ | Repetitive Peak Reverse Current | $T_c = 100^\circ\text{C}, V_{RRM}$ applied      | -                         | -    | 8.5  | mA   |
| $T_{rr}$  | Reverse Recovery Time           | $I_{FM} = 200\text{A}, V_R = 300\text{V}$       | $T_c = 25^\circ\text{C}$  | -    | 95   | ns   |
|           |                                 | $\frac{dI}{dt} = -100\text{A/us}$               | $T_c = 100^\circ\text{C}$ | -    | 180  | ns   |

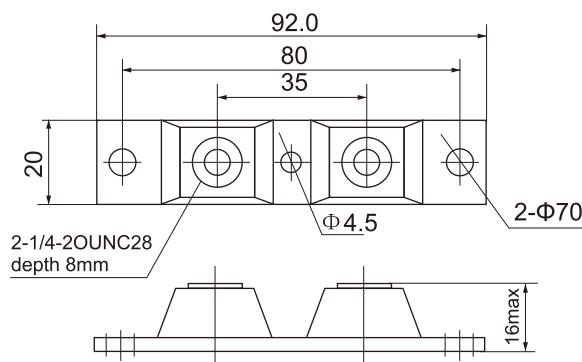

## Performance Curves

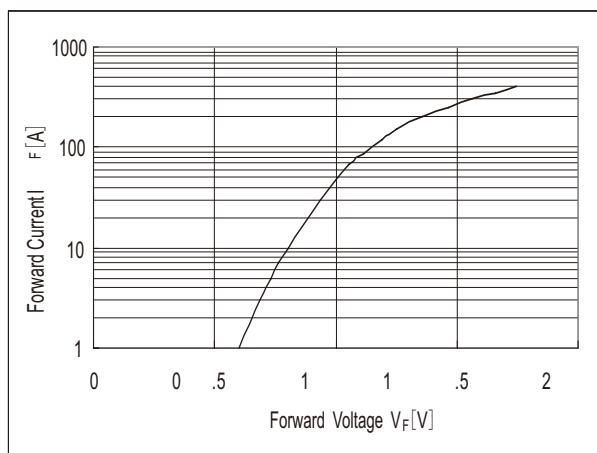


Fig. 1 : Typical Forward Voltage Drop  
vs. Instantaneous Forward Current

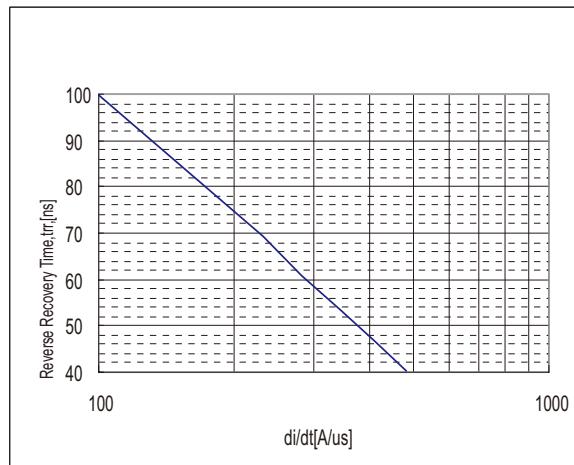


Fig. 2 : Typical Reverse Recovery Time  
vs.  $-di/dt$

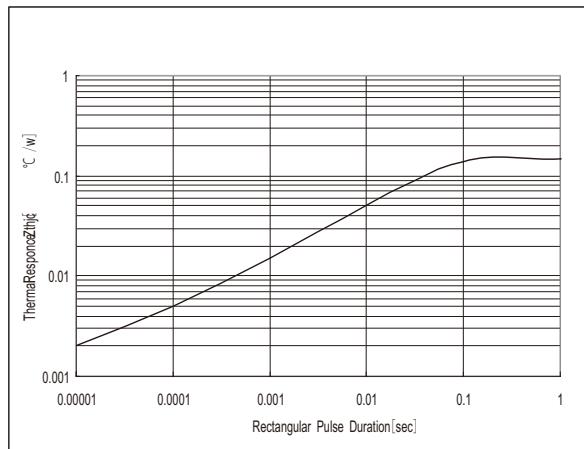


Fig. 3 : Transient Thermal Impedance ( $Z_{thjc}$ )  
Characteristics

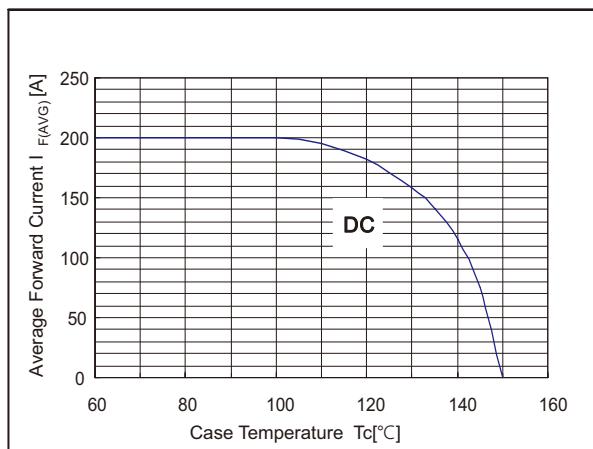


Fig. 4 : Forward Current Derating Curve