



浙江世菱半导体有限公司  
ZHEJIANG SHILING SEMICONDUCTOR CO.,LTD.

## 产品规格书

Specification of products

产品名称：可控硅模块

产品型号：MFC110A-T03

浙江世菱半导体有限公司  
ZHEJIANG SHILING SEMICONDUCTOR CO., LTD.

地址：浙江省 丽水市 莲都区

电话：(0578) 3012571 3615078

传真：(0578) 3611180

邮编：323000

E-mail: smrshiling01@163.com


[Http://www.smrshiling.com](http://www.smrshiling.com)

拟制	审核	核准
林益龙	曹剑龙	宗瑞


SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T <sub>j</sub> (°C)	VALUE			UNIT
				Min	Type	Max	
I <sub>T(AV)</sub> I <sub>F(AV)</sub>	Mean on-state current	180° half sine wave 50Hz Single side cooled, T <sub>C</sub> =85°C	125			110	A
I <sub>T(RMS)</sub>	RMS on-state current	Single side cooled, T <sub>C</sub> =85°C	125			173	A
V <sub>DRM</sub> V <sub>RRM</sub>	Repetitive peak off-state voltage Repetitive peak reverse voltage	V <sub>DRM</sub> &V <sub>RRM</sub> tp=10ms V <sub>DsM</sub> &V <sub>RsM</sub> = V <sub>DRM</sub> &V <sub>RRM</sub> +200V respectively	125	600		1600	V
I <sub>DRM</sub> I <sub>RRM</sub>	Repetitive peak current	at V <sub>DRM</sub> at V <sub>RRM</sub>	125			12	mA
I <sub>TSM</sub>	Surge on-state current	10ms half sine wave	125			2.40	KA
I <sup>2</sup> t	I <sup>2</sup> T for fusing coordination	V <sub>R</sub> =60%V <sub>RRM</sub>				29.3 A <sup>2</sup> s*10 <sup>3</sup>	
V <sub>TO</sub>	Threshold voltage		125			0.8	V
r <sub>T</sub>	On-state slop resistance					2.29 mΩ	
V <sub>TM</sub>	Peak on-state voltage	I <sub>TM</sub> =330A	125			1.4	V
dv/dt	Critical rate of rise of off-state voltage	V <sub>DM</sub> =67%V <sub>DRM</sub>	125			800 Vs/μ	
di/dt	Critical rate of rise of on-state current	From 67%V <sub>DRM</sub> to 330A, Gate source 1.5A t <sub>r</sub> ≤0.5 μs Repetitive	125			100 As/μ	
I <sub>GT</sub>	Gate trigger current		25	20		100 mA	
V <sub>GT</sub>	Gate trigger voltage	V <sub>A</sub> =12V, I <sub>A</sub> =1A		0.7		2.0 V	
I <sub>H</sub>	Holding current			20		100 mA	
T <sub>q</sub>	Gate controlled turn off time	I <sub>TM</sub> = I <sub>0</sub> , V <sub>D</sub> = 67%V <sub>DRM</sub> , dv/dt=20 V/ us V <sub>R</sub> = 100 V. -di/dt= 20 A/ us	125	90		110 uS	
V <sub>GD</sub>	Non-trigger gate voltage	At 67%V <sub>DRM</sub>	125			0.2 V	
R <sub>th(j-c)</sub>	Thermal resistance Junction to heatsink	At 180 ° sine Single side cooled				0.250 °C/W	
V <sub>iso</sub>	Isolation voltage	50Hz, RM. S, t=1min, I <sub>iso</sub> :1mA (MAX)		2500			V
F <sub>m</sub>	Thermal connection torque( M5)				4.0		N.m
	Mounting torque(M6)				5.0		N.m
T <sub>stg</sub>	Stored temperature			-40		140	°C
W <sub>t</sub>	Weight				154		g
Outline							

## OUTLINE DRAWING & CIRCUIT DIAGRAM

MFC



MFC-1



## Rating and Characteristic

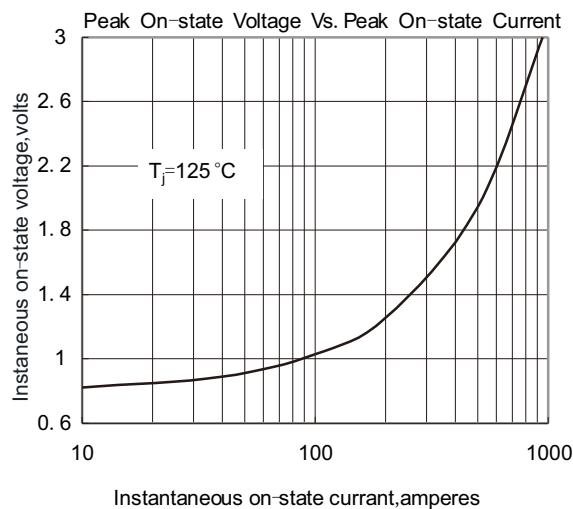


Fig. 1

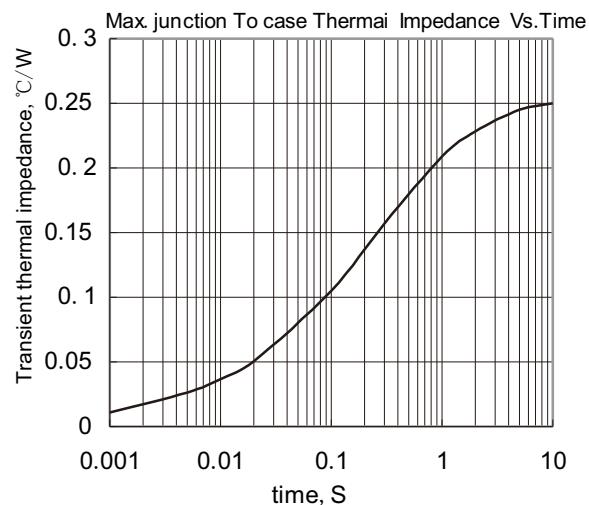


Fig. 2

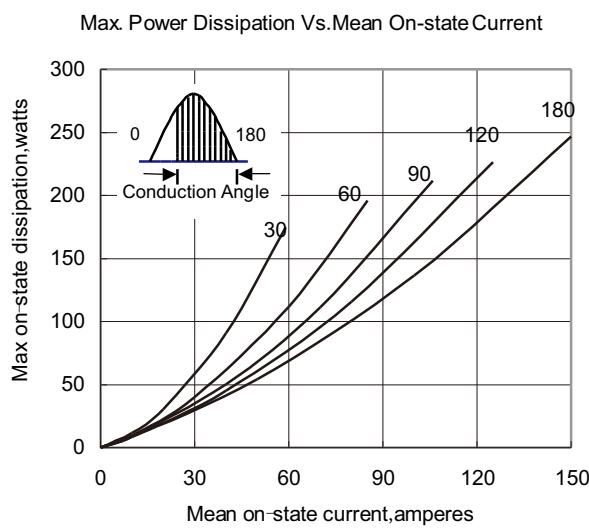


Fig. 3

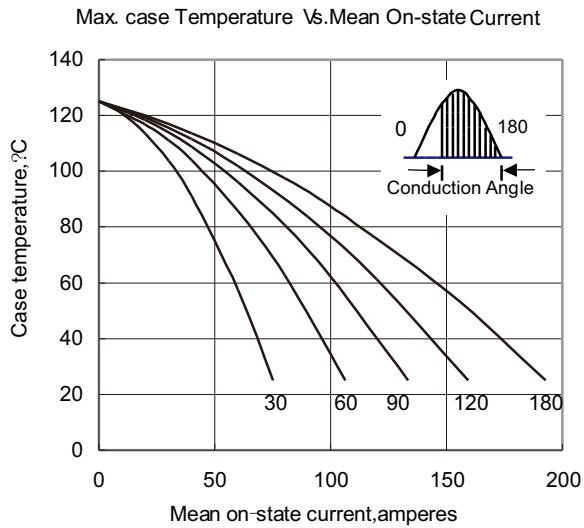


Fig. 4

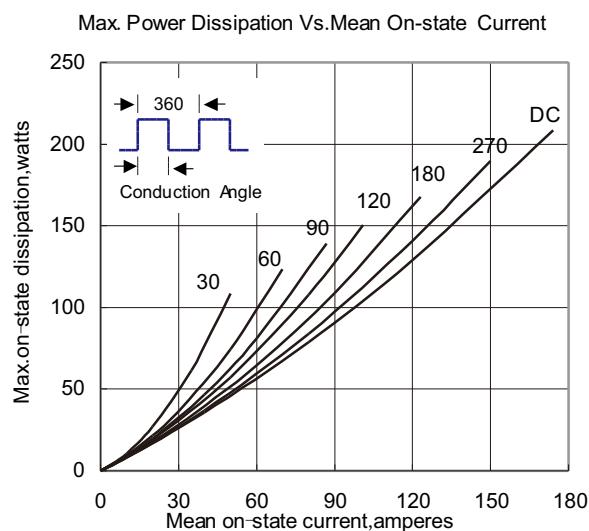


Fig. 5

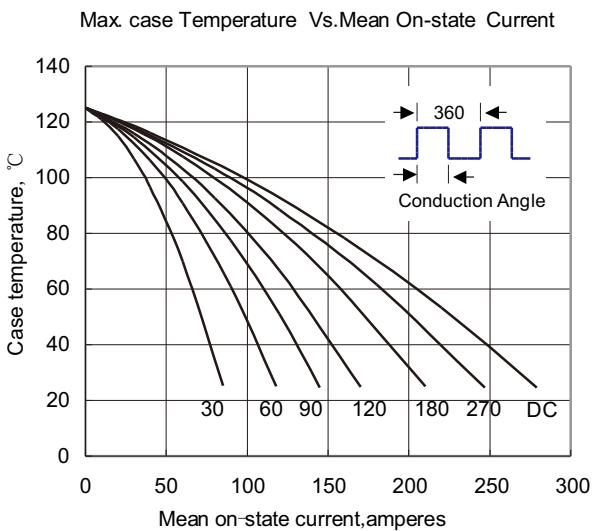


Fig. 6

## Rating and Characteristic

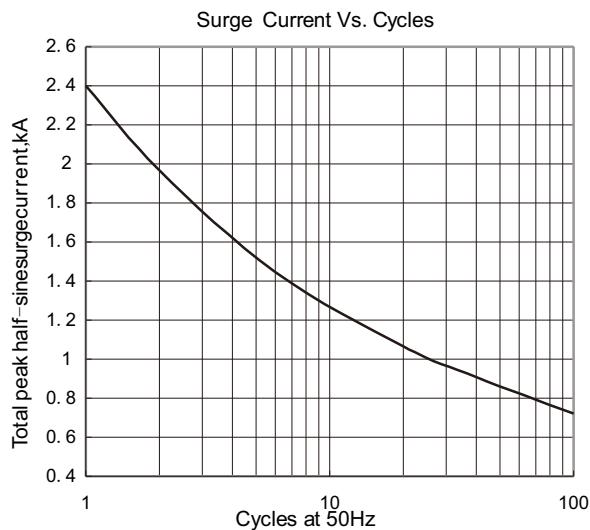


Fig. 7

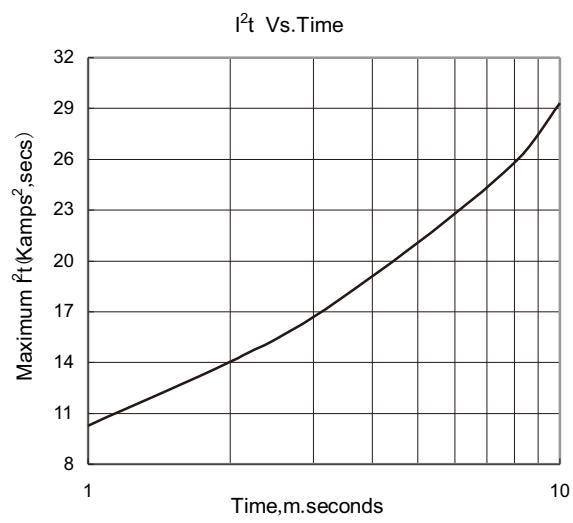


Fig. 8

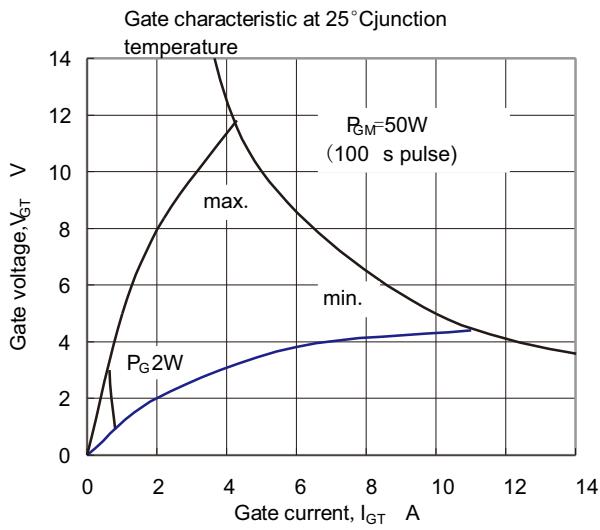


Fig. 9

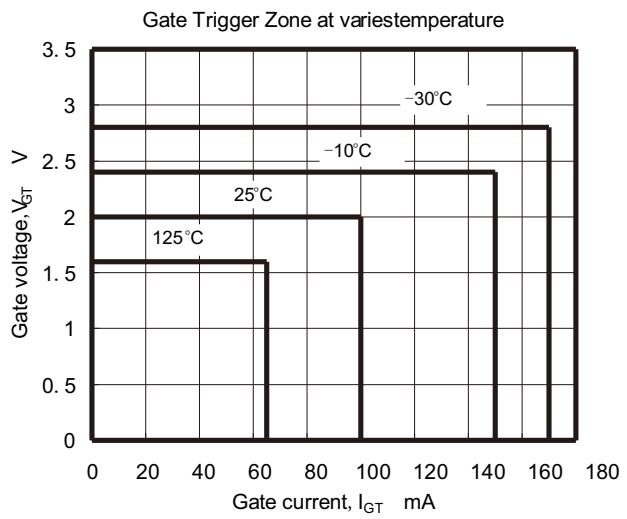


Fig. 10

## Outside Dimension

